


HM65-HC800LFTR13

High Current
Low Profile
SMD Inductor





- Height 5.6mm Max.
- Footprint 13.5x12.5mm Max.
- RoHS compliant



Specification @ 25°C

- Inductance @ 100kHz, 100mV
- DC Resistance
- Rated Current (20% drop of inductance)
- Saturation Current (30% drop of inductance)
- Heating Current, $\Delta T = 40^\circ\text{C}$

1.0uH \pm 20%
 1.7m Ω (2.5m Ω Max)
 21Adc
 23Adc
 21Adc

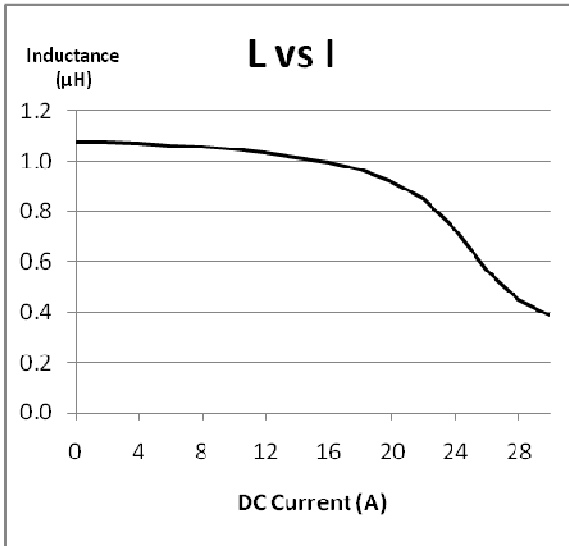

Packaging

- One 13" reel 400pcs
- One shipping carton 6 reels or 2400pcs

