

MODEL BHV SERIES

BHV Series

- High Voltage / High Value / High Power
- Thick Film SIP, Pin, Wire & Solder Pad Connections
- Epoxy / Polymer Coated Resistors
- Precision Dividers
- RoHS Compliant



ELECTRICAL

Resistance Range, Maximum	1G Ohm
Standard Tolerances	±1% (F Tol.), ±5% (J Tol.), ±10% (K Tol.)
Operating Temperature Range	-55°C to +125°C
Temperature Coefficient of Resistance, Maximum	<100ppm/°C
Voltage Coefficient	<2ppm/V
Divider Ratio	1,000:1, Max.
Voltage Rating	Up to 50kV

(Power Rating - Up to 150W (in mineral oil))

ENVIRONMENTAL (per MIL-PRF-83401)

Operating Temperature Range	-55°C to +125°C
Thermal Shock	ΔR 0.50%
Terminal Strength	ΔR 0.25%
Moisture Resistance	ΔR 0.50%
Mechanical Shock	ΔR 0.25%
Vibration	ΔR 0.25%
Low Temperature Storage	ΔR 0.25%
High Temperature Exposure	ΔR 0.25%
Load Life, 1000 Hours	ΔR 1.00%
Resistance to Solder Heat	ΔR 0.25%
Dielectric Withstanding Voltage	5000 V Minimum
Marking Permanency	MIL-STD-202, Method 215
Lead Solderability	MIL-STD-202, Method 208
Flammability	UL-94V-0 Rated
Storage Temperature Range	-55°C to +125°C

General Note

BI Technologies reserves the right to make changes in product specification without notice or liability


MODEL BHV SERIES

MECHANICAL

Cover Coat	Style RS, PW & PF:	Polymer Cover Coat
	Styles RF & RW:	Epoxy
Substrate		Alumina
Resistor		Cermet

OUTLINE DIMENSIONS (mm)


BHVXXRF / PF

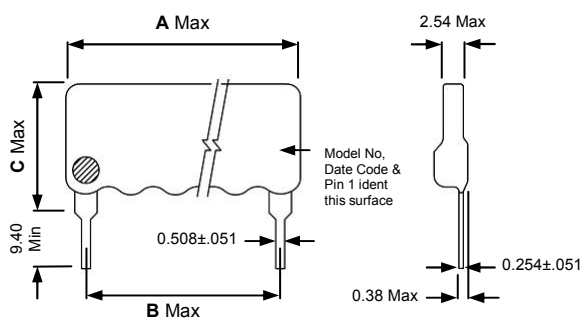

MODEL	VOLTAGE MAX	A	B	C
BHV10RF/PF	10kV	24.2	20.32	10.16 MAX.
BHV15RF/PF	15kV	29.3	25.40	12.70 MAX.
BHV20RF/PF	20kV	37.6	33.02	15.24 MAX.
BHV30RF/PF	30kV	59.7	50.80	15.24 MAX.

(Higher Ratings Available on Request)


BHVXXRW / PW

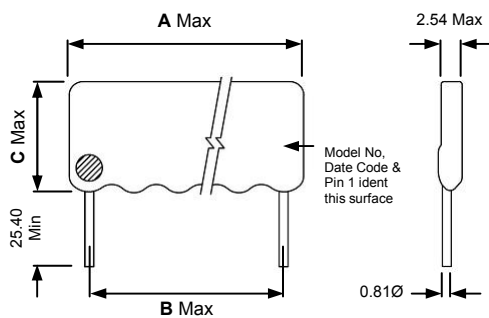

MODEL	VOLTAGE MAX	A	B	C
BHV10RW/PW	10kV	24.2	20.32	10.16 MAX.
BHV15RW/PW	15kV	29.3	25.40	12.70 MAX.
BHV20RW/PW	20kV	37.6	33.02	15.24 MAX.
BHV30RW/PW	30kV	59.7	50.80	15.24 MAX.

(Higher Ratings Available on Request)

BHVXXRS

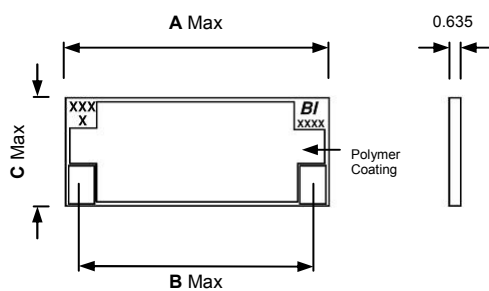

MODEL	VOLTAGE MAX	A	B	C
BHV10RS	10kV	22.86	20.32	7.62 MAX.
BHV15RS	15kV	27.94	25.40	10.16 MAX.
BHV20RS	20kV	36.32	33.02	12.70 MAX.
BHV30RS	30kV	58.42	50.80	12.70 MAX.

(Higher Ratings Available on Request)



Schematic - All Models

General Note


BI Technologies reserves the right to make changes in product specification without notice or liability

MODEL BHV SERIES

POWER (Watts) DISSIPATION @ 70°C

Model	Power (Max)
BHV 10	1.0
BHV 15	1.5
BHV 20	2.0
BHV 30	3.0

POWER DERATING CURVE

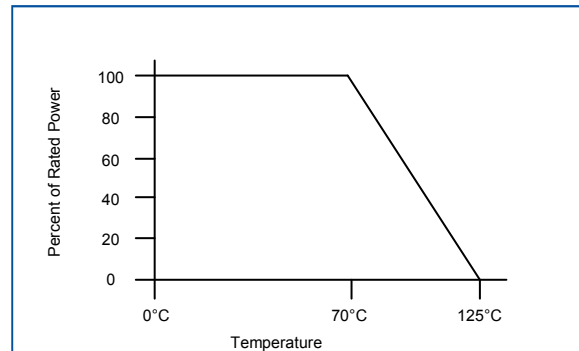


BHV - PRECISION DIVIDER

Specification Notes

- 1) $R1+R2 = 1G \text{ Ohm } \pm 5\% \text{ (Max)}$
- 2) Typical Ratio - $(R1+R2)/R2 = 1000, 500, 100$
- 3) Ratio Tolerance = 10%, 5%, 2%, 1%
- 4) TCR = $<100\text{ppm}/^\circ\text{C Max (+5}^\circ\text{C to +50}^\circ\text{C)}$
- 5) Ratio TCR = $50\text{ppm}/^\circ\text{C Max}$
- 6) VCR = $2\text{ppm}/V \text{ Max}$
- 7) Max Operating Voltage = $2\text{kV Max (over 1G Ohm)}$

SCHEMATIC

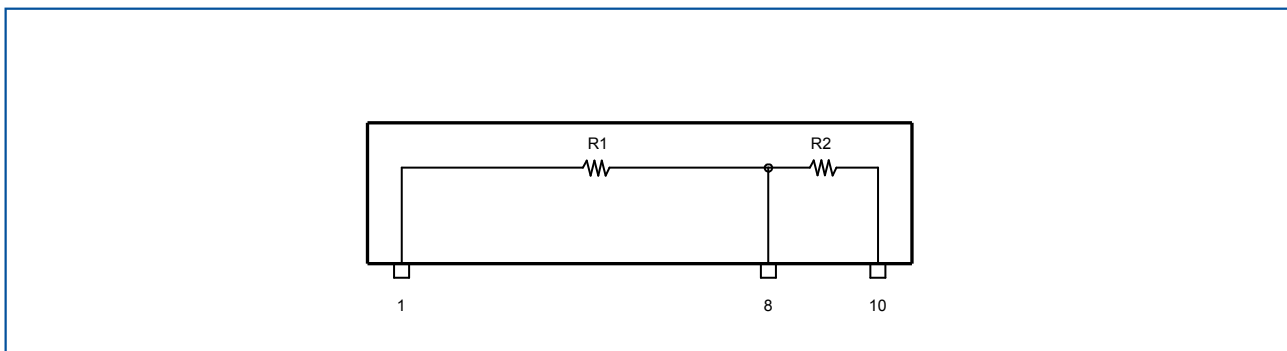

General Note

BI Technologies reserves the right to make changes in product specification without notice or liability

MODEL BHV SERIES


MECHANICAL

Cover Coat	Style RS & PF:	Polymer Cover Coat
	Styles RF :	Epoxy
Substrate		Alumina
Resistor		Cermet

OUTLINE DIMENSIONS (mm)

BHVXXRF / PF


MODEL	VOLTAGE MAX	A	B	C	D
BHV2RF/PF	2kV	25.40	17.78	5.08	9.65 MAX.

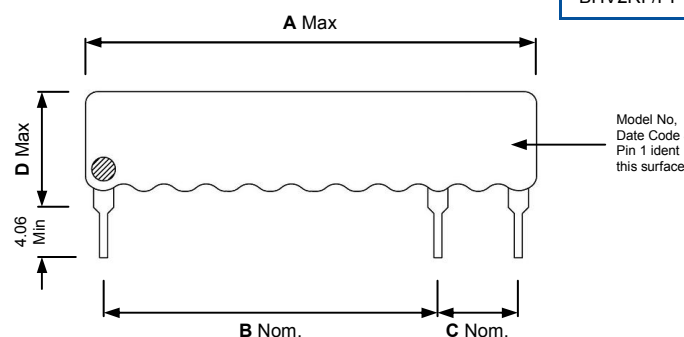

Model No., Date Code & Pin 1 ident this surface

BHVXXRS

MODEL	VOLTAGE MAX	A	B	C	D
BHV2RS	2kV	24.77	17.78	5.08	7.14 MAX.

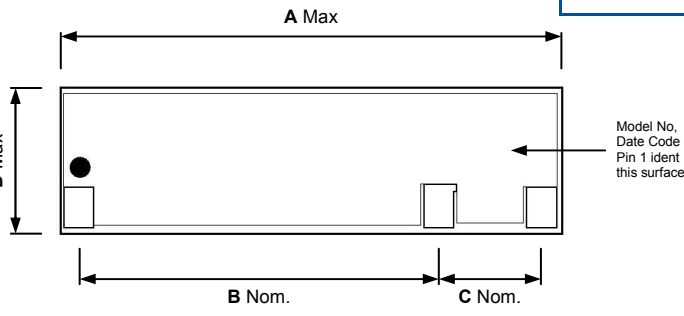


Model No., Date Code & Pin 1 ident this surface

General Note
 BI Technologies reserves the right to make changes in product specification without notice or liability

MODEL BHV SERIES

ORDERING INFORMATION

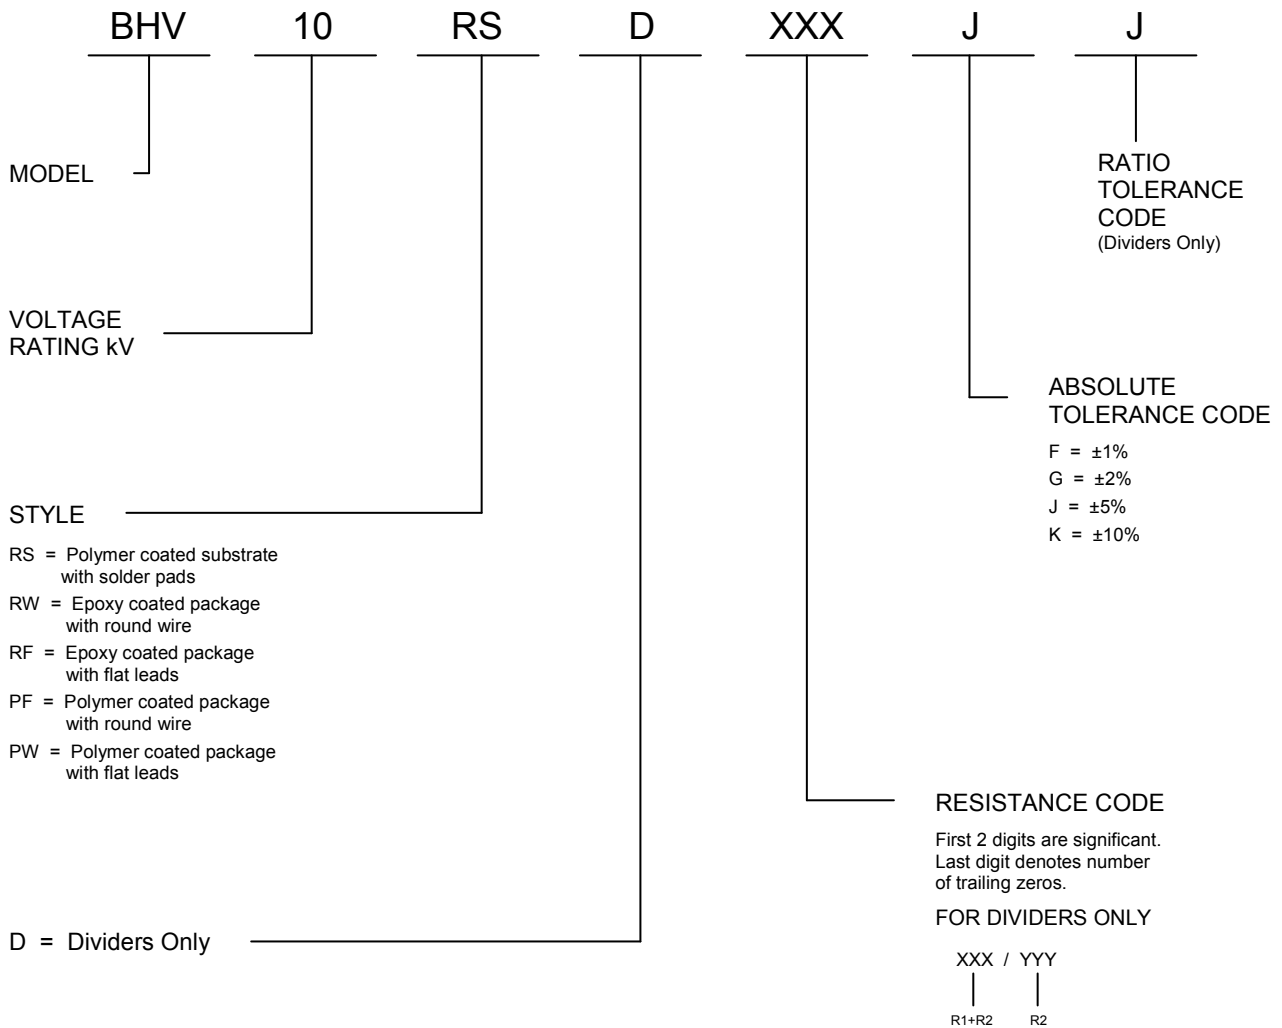

PACKAGING

Standard: Box Capacity 100 units

General Note

BI Technologies reserves the right to make changes in product specification without notice or liability